




GUARD WASH®

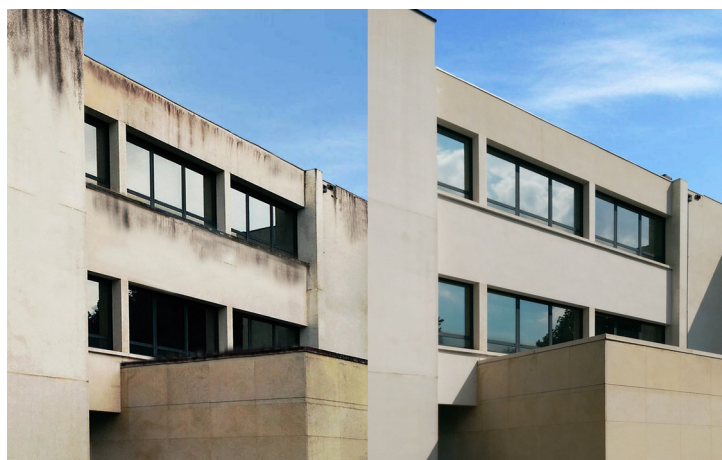

FAST CLEANER WHICH REMOVES ALL TYPES OF SOILING INVADING RENDER, WALLS, FLOORS AND ROOFS

- ✓ **HIGH PENETRATING POWER**
- ✓ **FAST ACTING, NO NEED TO RINSE**
- ✓ **DOES NOT ALTER MATERIAL SURFACE**

- ✓ **SOLVENT-FREE, ACID-FREE**
- ✓ **READY TO USE**
- ✓ **EXTERIOR**

PRODUCT DESCRIPTION

Guard Wash® is a high-performance cleaner which completely removes soiling invading the building materials (greasy stains, mold, algae, pollution, tannins, leaf litter stains, etc.). Guard Wash® is fast-acting and efficient, it can be left on the surface without rinsing. However, rinsing is possible 24 h after application to remove residues remaining on the surface.

Guard Wash® is potash-free, hydrochloric and phosphoric acid-free. Guard Wash® does not damage the treated material surface and does not alter its colour. It has been developed to replace corrosive or acidic cleaning products, which are hazardous for materials.

For lasting results, we recommend the use of the appropriate sealer from the Guard Industry range.

USE

Guard Wash® is recommended for the exterior treatment of walls, roofs, balconies, fountains, ponds, monuments, fences, decks, garden stones and paving, boat hulls, awnings, tennis courts...

It can be applied to all porous building materials such as concrete, natural and artificial stone, terracotta. It is ideal for renders.

DO NOT USE ON FABRICS OR METAL

CHEMICAL NATURE

Water-based surfactants, essential oil and alkaline wetting agents.

ADVANTAGES AND CHARACTERISTICS

- Quick efficiency in one coat and very quick in 2 or 3 coats.
- High penetrating power.
- Easy to use.
- Soda and potash-free.
- Organic solvent-free.
- Hydrochloric and phosphoric acid-free.

CONTAINERS

5 and 20 litres.

TECHNICAL DATA

Physical state at 20 °C	: Liquid
Colour	: Green
Odour	: Characteristic
pH	: 11,4
Boiling point [°C]	: 100°C
Relative density	: 1.02 ± 0.01
Solubility in water [vol/vol]	: Total
Flashpoint [°C]	: Not applicable
VOC	: < 1g/l*

HOW TO USE

- **Guard Wash®** is ready to use. Do not dilute.
- Apply an initial coat to the point of saturation (typical coverage is 6m² per Litre). For heavy soiling, 2 or 3 applications may be required.
- To get the best possible efficiency pressure clean heavily soiled surfaces prior to application. By removing the bulk of the easy to remove organics, there is less work for the cleaner to do, so you will use less.
- Always test on a small hidden portion of the substrate before applying.
- Spray on dry or slightly damp material until surface is saturated.

Recommendation

- **Light Soiling:** 1 application.
- **Heavy Soiling:** 2 applications if required.
- **Extreme Soiling:** 3 applications if required.
- Allow up to one hour between applications.
- On vertical surfaces always apply from bottom to top.
- Rinsing is not required except when additional treatments or coatings are to be applied to the surface.
- In case of rinsing, wait for 24H after application and use a high-pressure washer.
- Allow the substrate to dry completely before applying any coating or paint.

APPLICATION TOOLS

- Apply with a low-pressure spray unit.

PREVENTION

- To prevent future soiling, it is recommended to protect the surface with a protection treatment from the **ProtectGuard®** or **ImperGuard®** range.

COVERAGE

The following values are for guidance only:

- Light Soiling: 6 m² / litre
- Heavy Soiling: 4 m² / litre
- Extreme Soiling: 2 m² / litre

CLEANING YOUR EQUIPMENT

- Tools and equipment should be cleaned with water immediately after use.

STORAGE

- Store in a dry place at a temperature of between 5°C and 30°C.
- Shelf-life: 18 months from date of manufacture, in original unopened can.

RECOMMENDATIONS

- For effective results, **Guard Wash®** must be used when surface temperature is between 5°C and 30°C.
- Do not apply during periods of extreme heat, rain or risk of rain 8h after application. Ideal temperature range is between 5°C and 30°C.
- Do not mix or dilute.
- Avoid spraying the surroundings of the material or surface being treated.
- Take care not to spray plants or animal fodder or feed.
- Protect the environment. If plants are accidentally sprayed, rinse abundantly with water to reduce damage.
- Disposal: Rinse container thoroughly with water and place it in a plastic recycling bin.

HEALTH AND SAFETY

- **Breathing protection:** No breathing protection equipment is required under normal use conditions with suitable ventilation.
- **Hand protection:** Wear household rubber gloves.
- **Skin protection:** No skin protection or special clothing is recommended under normal use conditions.
- **Eye protection:** If there is a significant risk of splashes, wear protective goggles.
- **In case of ingestion:** Do not induce vomiting. Contact a doctor or specialist.

KEEP OUT OF REACH OF CHILDREN

TECHNICAL SUPPORT

GUARD INDUSTRY

9 Byron Road, Armadale WA 6112, Australia

Tel: 1300 249 767

E-mail: info@guardindustry.com.au

www.guardindustry.com.au

Important: The content of this documentation is based on our experience with the product. Guard Industry guarantees the quality of its products but expressly disclaims all liability if the user does not follow the recommendations and conditions of use of the products, especially but not exclusively in the case of faulty application, application by untrained personnel, use of products not compatible with Guard Industry products, or adverse weather conditions. For more information, consult the safety data sheet.

For the most recent version of our data sheet, visit our website www.guardindustry.com.au

Last updated: 01/02/2026